


Galileosky 7x

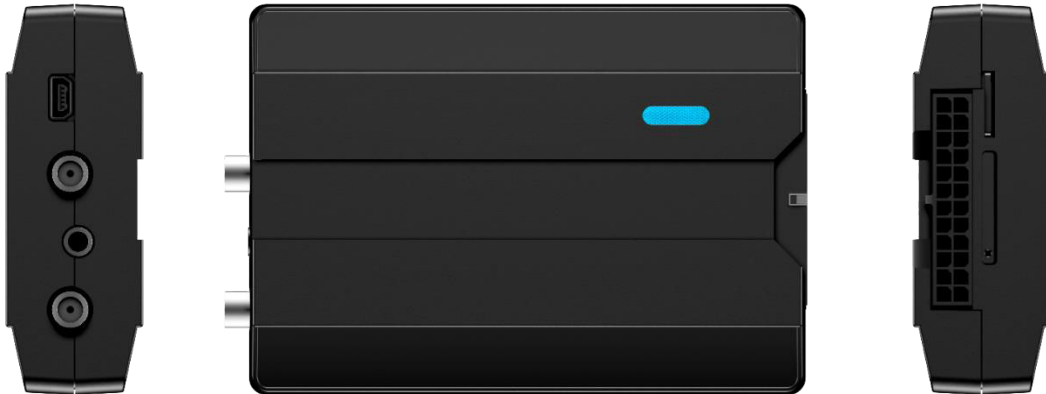

A feature rich GPS tracker for advanced fleet management

- 2 CAN
- RS 485, RS 232, 1-Wire
- 6 inputs/ 4 outputs
- Bluetooth 5.0
- Easy Logic, CAN Scanner, Eco Driving, Exigner

Tech Specs

Antennas	GPS / GLONASS, GSM
Types of antennas	Internal or external (SMA connectors)
Cellular channel	2G by default 3G, LTE (Cat M1 / Cat NB1) optionally
SIM	2 nano-SIM
Accelerometer	Built-in
CAN	2 CAN buses J1939, FMS, J1979, OBD II 29-bit and 11-bit identifiers
Memory capacity	Internal: 4 Mb or up to 170 000 points MicroSD: up to 512 Gb, industrial type
PC connection	Mini-USB 2.0

Built-in battery	Li-Ion, 600 mAh 500 charge/discharge cycles
Operating and storage temperature range	-40...+85°C
Housing material	Plastic
IP protection	IP 54
Size	97 x 68 x 24 mm for internal antennas 102 x 68.0 x 24 mm for external antennas 150 g

Built-in technologies

- Remote configuring
- GSM jamming detection
- Up to 3 500 polygonal geofences
- Autoinformers
- Voice communication
- Two server data transmission
- Second by second accident reconstruction
- DDD-files download
- Driving violation alerts
- Modbus
- CAN FD
- Voice communication

Bismark Colombia, S.A.S.
Cra. 7 # 84A - 29, Of. 301
Bogotá, Colombia.
PBX: (+57) (601) 743-2828

info@bismark.net.co

Síguenos:



@BismarkColombia

Distribuidor autorizado:

bismark

bismark.net.co